Art.-Nr. 511035

Rev. 1.3

ASSEMBLY INSTRUCTIONS

KRUSE UniversalDepot plus

KRUSE

UniversalDepot plus

1. Description

The KRUSE UniversalDepot plus provides simple and secure key storage and includes an electric door opener. For lower security requirements, it is available in a standard version with six simple key hooks; for higher security needs, it can be optionally equipped with up to four key monitoring units. Designed for surface mounting.

2. Scope of delivery

UniversalDepot plus (including 6 key hooks)
optional: up to 4 x key monitoring (Art. 511037)
optional: Connection cable 10 m (Art. 511036)
3 x Segment anchor

3. Connection diagram

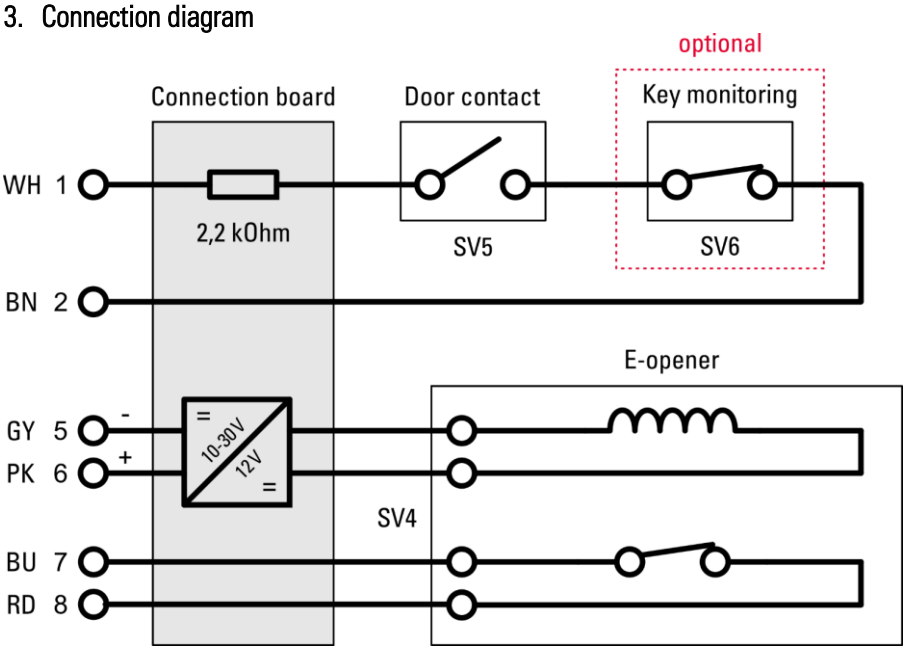

4. Assembly

1) Mark the drill-holes for segment anchors and cable entry.
2) Carry out drilling. The drill-holes for the segment anchors have to be ø 6 mm, at least 55 mm deep. Clean drill-holes (s. image).
3) Now drive segment anchors into the drill-holes (s. image). Place the depot and tighten it with a torque wrench (6 Nm).

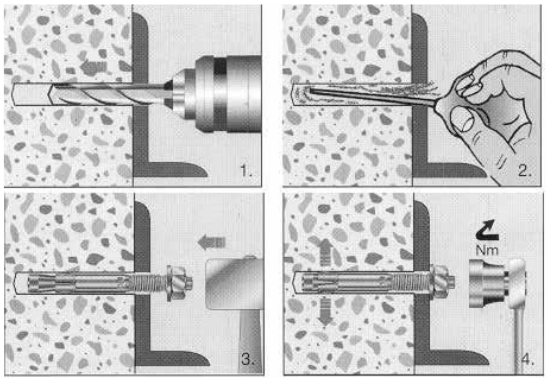

KRUSE Sicherheitssysteme

5. Technical specifications

- Stainless steel (1.4301) according to DIN 14675 (FSD Class 1)
- Current consumption depot:
  - approx. 330 mA (at 12 V DC) | approx. 150 mA (at 24 V DC)
- Internal resistance depot (gray/pink) approx. 150 kΩ
- Monitoring resistor (internal) approx. 2,2 kΩ
- Door monitoring with micro switch, electrical door opener with feedback contact
- Material: 3 mm stainless steel (1.4301)
- Dimensions: approx. 202 x 202 x 110 mm (H x W x D)
- Weight: approx. 5,2 kg

6. Care instructions

- Stainless steel products require regular maintenance to ensure trouble-free functionality. For severe dirt and corrosion (e.g. flash rust) we recommend the KRUSE stainless steel cleaning and care set for optimal results (Art. 520600).
- To protect against corrosion, preferably treat the cylinder with KRUSE „Super Lube“ (Art. 085001).

7. Intended use

The KRUSE UniversalDepot is used to deposit keys. It is suitable for indoor and protected outdoor use. Assembly only by professionals. Only use with original KRUSE products. Only use as detailed in this document. ATTENTION: Depositing a key represents an increased risk and should be discussed with the property insurer if necessary.

8. Any questions?

Our support staff is ready to help:
Tel.: +49 4174 592-44
E-Mail: support@kruse-sicherheit.de

9. Technical drawing

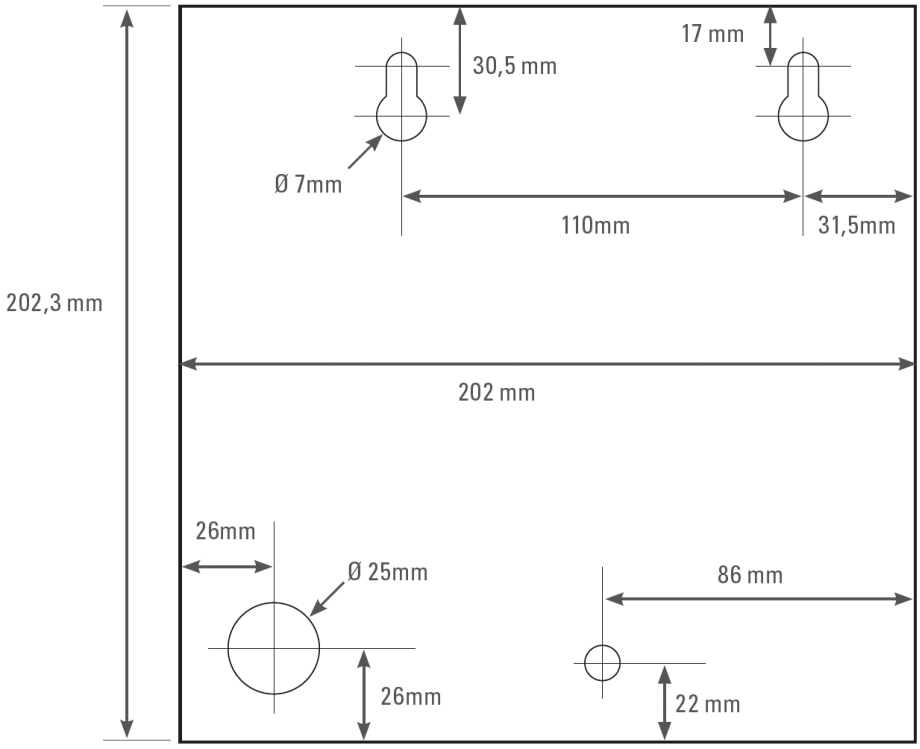

Technische Änderungen vorbehalten
12.2025